Declaration of Conformity (DoC)

We, Shenzhen Doke Electronic Co., LTD
801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China

Declare that the DoC is issued under our sole responsibility and belongs to the following product(s):

Product Type:	Smart Phone
Trademark:	Blackview
Model Number(s):	FORT 200

Operating system:

Hardware Version: E5J7_MAIN_PCB_V1.1

Software Version: FORT_200_EEA_E5J7_V1.0_A16_01_20250107V02

(Name of product, type or model, batch or serial number)

System components:

NFC/WPT: Coil Antenna

PIFA Antenna

Bluetooth: 1.5dBi

2.4G WLAN: 1.5dBi

5G WLAN: 1.9dBi

GSM 900: -1.8 dBi; GSM 1800: 1.1 dBi

WCDMA B1: 1.2 dBi; WCDMA B8: -1.8 dBi

LTE B1: 1.2 dBi; LTE B3: 1.1 dBi; LTE B7: 1.2 dBi; LTE B8: -1.8 dBi; LTE B20: -1.9 dBi; LTE B28: -2.1 dBi

Adapter:

Model: HJ-C6-33-EU

Input: 100-240~50/60Hz 0.8A

Output: 5.0V 3.0A 15.0W or 9.0V 3.0A 27.0W or 12.0V 2.5A 30.0W or 15.0V 2.0A 30.0W or 20.0V 1.5A 30.0W

PPS: 3.3V-11.0V 3.0A 33.0W MAX

Manufacturer: Shenzhen Huajin Electronics Co., Ltd

Rechargeable Li-ion Battery:

Model: LiFHPS496487PFH; Specification: DC 3.87V, 5000mAh

Manufacturer: Guangdong Fenghua New Energy Co., Ltd.

USB Cable: 100cm;

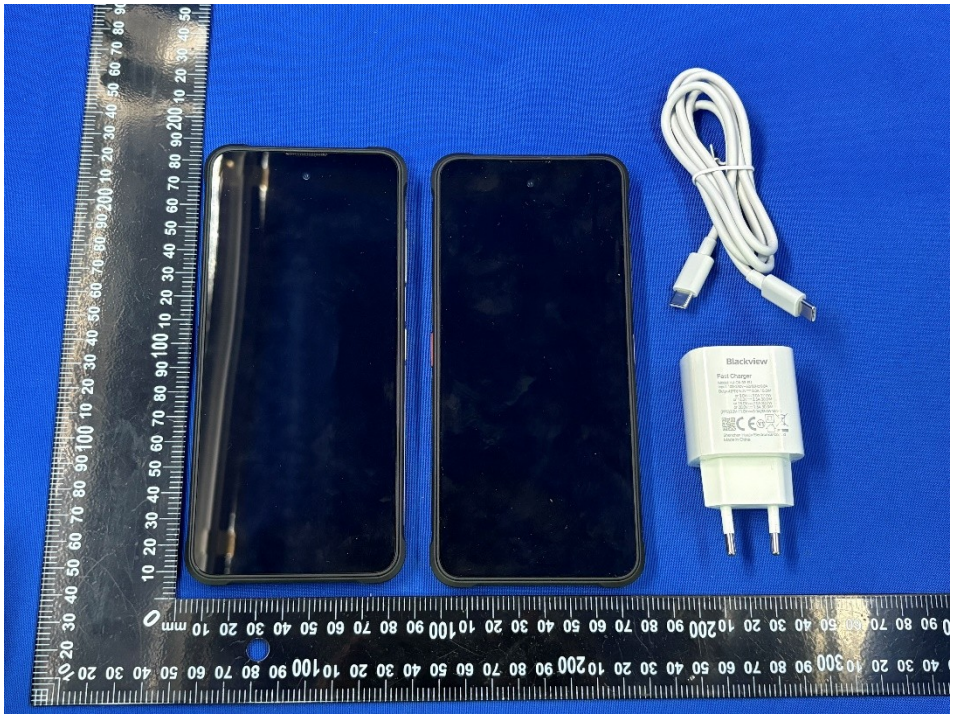

The object of the declaration described above is in conformity with the essential requirements of the relevant Union harmonization legislation: Radio Equipment Directive *RED (2014/53/EU)*.

The following *harmonized* standards and technical specifications have been applied:

HEALTH & SAFETY (Art. 3(1)(a)):

EN 50360:2017+A1:2023 EN 50566:2017+A1:2023 EN IEC/IEEE 62209-1528:2021 EN 50663:2017 EN 62479:2010

EN IEC 62368-1:2020+A11:2020

EMC (Art. 3(1)(b)):

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-3 V2.3.2 (2023-01)

ETSI EN 301 489-17 V3.3.1 (2024-09)

ETSI EN 301 489-19 V2.2.1 (2022-09)

ETSI EN 301 489-52 V1.3.1 (2024-11)

EN 55032:2015+A11:2020

EN IEC 61000-3-2:2019+A2:2024

EN 61000-3-3:2013+A2:2021+AC:2022

EN 55035:2017+A11:2020

Radio Spectrum (Article 3.2):
ETSI EN 300 328 V2.2.2 (2019-07)

ETSI EN 301 893 V2.1.1 (2017-05)

ETSI EN 300 440 V2.2.1 (2018-07)

EN300 330 V2.1.1(2017-02)

ETSI EN 303 345-1V1.1.1(2019-06)

ETSI EN 303 345-3V1.1.1(2021-06)

ETSI EN 303 413 V1.2.1 (2021-04)

ETSI EN 303 417 V1.1.1 (2017-09)

ETSI EN 301 511 V12.5.1 (2017-03)

ETSI TS 151 010-1 V13.14.0(2024-06)

ETSI EN 301 908-1 V15.2.1 (2023-01)

ETSI EN 301 908-2 V13.1.1 (2020-06)

The submitted samples of the above equipment has been tested and found to comply with the following European Directives:
RoHS Directive 2011/65/EU & (EU) 2015/863

Notified Body Involved:

Notified Body Name: DERYCOM CERTIFICATION SERVICES, INC.
Notified Body Number: 3052
Notified Body Assessment Performed: Module B/C on Article 3.1a, 3.1b, 3.2
EU-type examination certificate number: JEC-78

RF Specification:

Functon	Operaton Frequency	Max RF output power:
BLE	2402MHz–2480MHz	3.24dBm
BT(BR+EDR)	2402MHz–2480MHz	1.38dBm
WIFI 2.4G 802.11b/n(20MHz): 802.11n(40MHz):	802.11b/n(20MHz):2412-2472MHz 802.11n(40MHz):2422~2462MHz	14.01dBm
Wi-Fi 5.2G 802.11a/n/ac (20MHz): 802.11n/ac(40MHz): 802.11ac(80MHz):	802.11a/n/ac (20MHz):5180~5240MHZ 802.11n/ac(40MHz):5190~5230MHZ 802.11ac(80MHz):5210MHz	14.17dBm
Wi-Fi 5.8G 802.11a/n/ac (20MHz): 802.11n/ac(40MHz): 802.11ac (80MHz):	802.11a/n/ac(20MHz):5745~5825MHz 802.11n /ac(40MHz):5755~5795MHz 802.11ac (80MHz):5775MHz	13.53dBm
GSM/GPRS/EGPRS 900	TX(Uplink):880M-915MHZ; RX(Downlink):925M-960MHZ	32.82dBm
GSM/GPRS/EGPRS 1800	TX(Uplink):1710M-1785MHZ; RX(Downlink):1805M-1880MHZ	29.70dBm
WCDMA B1	TX(Uplink):1920-1980MHz; RX(Downlink):2110-2170MHz	23.10dBm
WCDMA B8	TX(Uplink): 880-915MHz; RX(Downlink):925-960MHz	22.64dBm
LTE FDD B1	TX(Uplink):1920-1980MHz; RX(Downlink):2110-2170MHz	23.58dBm
LTE FDD B3	TX(Uplink) :1710-1785MHz; RX(Downlink):1805-1880MHz	23.36dBm
LTE FDD B7	TX(Uplink) :2500-2570MHz; RX(Downlink):2620-2690MHz	23.07dBm
LTE FDD B8	TX(Uplink): 880MHz to 915 MHz RX(Downlink): 925 MHz to 960 MHz	23.17dBm
LTE FDD B20	TX(Uplink): 832MHz~862MHz; RX(Downlink):791MHz~821MHz	23.18dBm
LTE FDD B28	TX(Uplink): 703 MHz to 748MHz RX(Downlink): 758 MHz to 803 MHz	23.28dBm
GPS (RX)	Rx(Downlink): 1.57542GHz	--
NFC (RX)	13.56MHZ	--
WPT (RX)	110.5kHz~205kHz	--

Tests for SAR are conducted using standard operating positions with the device transmitting at its highest certified power level in all tested frequency bands. The maximum SAR values tested on this device when used in its normal position at the ear and when used closet other body (at a minimum distance of 5mm/0mm) are:

Max SAR Value(W/kg) Limitis 2.0(W/kg) for10-g	10-gHead	0.147
	10-gBody	1.498
Limitis 4.0(W/kg) for10-g	10-gMemberDAS	1.498

Technical file held by: Shenzhen Doke Electronic Co., LTD

801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China

Signed for and on behalf of: Shenzhen Doke Electronic Co., LTD

Name and Title: Liu yunlong/Manager

Address: 801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China



Signature of Authorized Person

2026-03-02